

# One Cell Lithium-ion/Polymer Battery Protection IC


## ■ General Description

The LN8232 provides a high integration solution for lithium-ion/polymer battery protection. The LN8232 contains advanced power MOSFET, high-accuracy voltage detection circuits and delay circuits.

The LN8232 has all the protection functions required in the battery application including over-charging, over-discharging, over-current and load short circuiting protection etc. The low standby current drains little current from the cell while in storage.

The device is targeted for any Li-Ion and Li-Poly battery-powered information appliances requiring long-term battery life.

## ■ Application Information

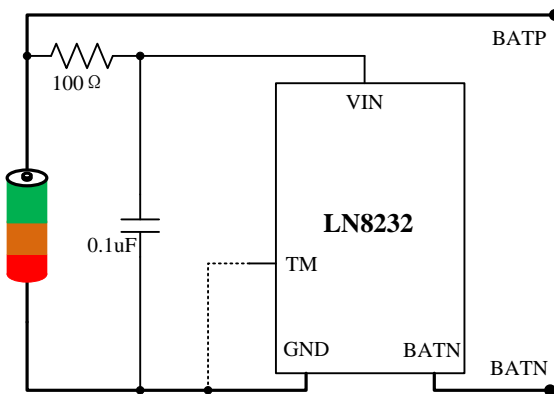


## ■ Features

- Protection of Charger Reverse Connection
- Protection of Battery Cell Reverse Connection
- High-accuracy Voltage Detection
- Charger Detection Function
- 0V Battery Charging Enable/Disable Function
- Integrate Advanced Power MOSFET(50mΩ)
- Low Current Consumption  
Operation Mode: 3.0μA typ.

## ■ Application

- One-Cell Lithium-ion Battery Pack
- Lithium-Polymer Battery Pack

## Package



## ■ Functional Pin Description

| Pin | SOT23-5L | Note                                     |
|-----|----------|--|
| 1   | TM       | Test terminal. Floating or Connct to GND |
| 2   | GND      | Ground                                   |
| 3   | VIN      | Power Supply                             |
| 4   | BATN     | The negative terminal of battery pack    |
| 5   | BATN     | The negative terminal of battery pack    |


■

**Ordering Information**
**LN8232 ①②③④⑤ - G**

| Designator | Symbol | VOV              | VOVR   | VUV    | VUVR   |
|------------|--------|------------------|--------|--------|--------|
| ①②③        | C5A    | 4.300V           | 4.150V | 2.500V | 2.900V |
|            | C5B    | 4.280V           | 4.150V | 2.500V | 2.900V |
|            | C5C    | 4.430V           | 4.250V | 2.500V | 2.900V |
|            | C5D    | 4.400V           | 4.250V | 2.500V | 2.900V |
|            | C5F    | 4.220V           | 4.070V | 2.450V | 2.850V |
| ④          | M      | SOT23-5L Package |        |        |        |
| ⑤          | R      | Reel             |        |        |        |
|            | T      | Tape             |        |        |        |
| G          |        |                  |        |        |        |


**Marking Information**

| Designator | Symbol                                    | Description               |
|------------|---|---------------------------|
| ①          | C   | LN8232                    |
| ②          | A   | VOV: 4.300V, VOVR: 4.150V |
|            | B   | VOV: 4.280V, VOVR: 4.150V |
|            | C   | VOV: 4.430V, VOVR: 4.250V |
|            | D   | VOV: 4.400V, VOVR: 4.250V |
|            | F   | VOV: 4.220V, VOVR: 4.070V |
| ③          | M   | SOT23-5L Package          |
| ④          | Tracking information for internal quality |                           |

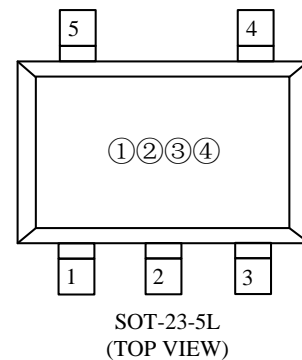
**Absolute Maximum Ratings**

| Parameter                                       | Symbol           | Max             | Unit |
|---|------------------|-----------------|------|
| Supply Voltage                                  | V <sub>IN</sub>  | GND-0.3~GND+6.0 | V    |
| Power Dissipation                               | PD@TA=25°C       | 0.4             | W    |
| Package Thermal Resistance(Junction to Ambient) |                  | 130             | °C/W |
| Lead Temperature                                |                  | 260             | °C   |
| Ambient Temperature                             | T <sub>opa</sub> | -40~+85         |      |
| Storage Temperature                             | T <sub>str</sub> | -55~+125        |      |
| ESD Susceptibility                              | HBM              | 4000            | V    |

■ Function Block Diagram

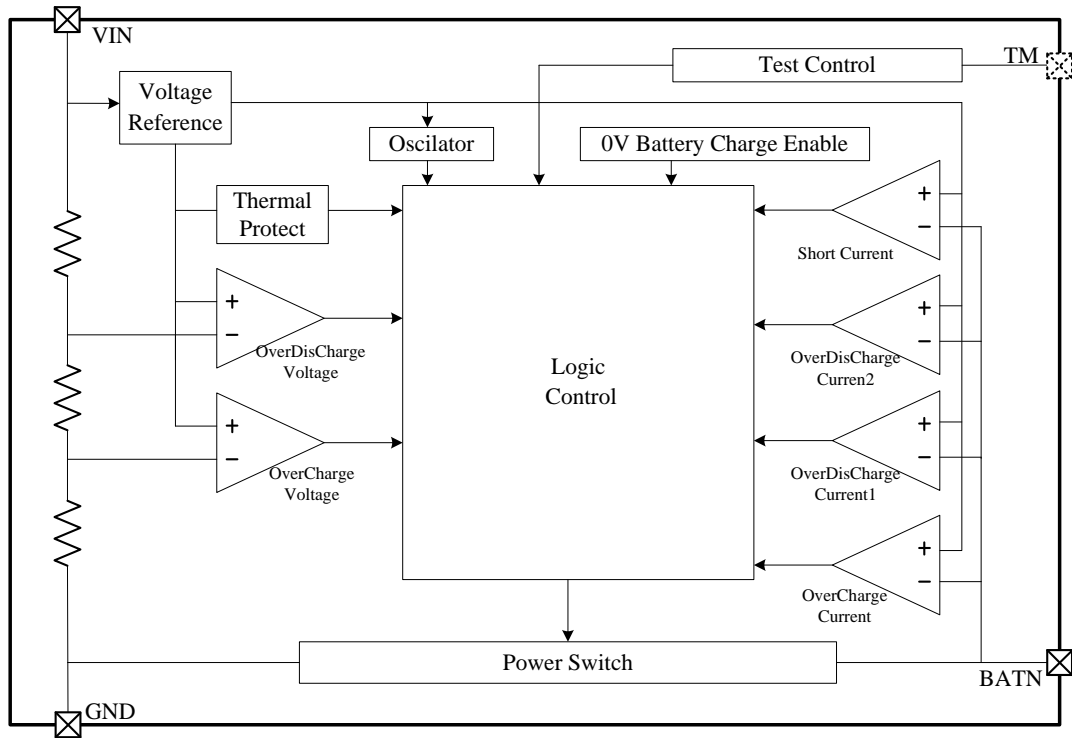

**■ Electrical Characteristics**

 Note:  $V_{VIN} = 3.5V$ ,  $T_A = 25^\circ C$ , unless otherwise specification.

| Parameters  | Test Condition                      | Min  | Typ   | Max  | Unit       |
|---|-------------------------------------|------|-------|------|------------|
| <b>Voltage</b>  |                                     |      |       |      |            |
| Over-Charge Detection Voltage   |                                     | 4.27 | 4.30  | 4.33 | V          |
| Over-Charge Release Voltage   |                                     | 4.12 | 4.15  | 4.18 | V          |
| Over-Discharge Detection Voltage  |                                     | 2.46 | 2.50  | 2.54 | V          |
| Over-Discharge Release Voltage  |                                     | 2.86 | 2.90  | 2.94 | V          |
| Charger Detection Voltage   |                                     |      | -0.50 |      | V          |
| <b>Current</b>  |                                     |      |       |      |            |
| Over-Discharge Current Detection 1  | $V_{DD} = 3.5V$                     |      | 3     |      | A          |
| Over-Discharge Current Detection 2  | $V_{DD} = 3.5V$                     |      | 10    |      | A          |
| Load Short Detection  | $V_{DD} = 3.5V$                     |      | 20    |      | A          |
| Normal Operator Current   | $V_{DD} = 3.5V$ , $V_{BATN} = 0V$   |      | 3.0   | 6    | $\mu A$    |
| Power Down Current  | $V_{DD} = 2.0V$ , BATN floating     |      | 2.0   | 4    | $\mu A$    |
| <b>Delay Time</b>   |                                     |      |       |      |            |
| Over-Charge Voltage Detection Delay Time  |                                     |      | 200   |      | mS         |
| Over-Discharge Voltage Detection Delay Time   |                                     |      | 50    |      | mS         |
| Over-Discharge Current Detection 1 Delay Time   |                                     |      | 12    |      | mS         |
| Over-Discharge Current Detection 2 Delay Time   |                                     |      | 2.5   |      | mS         |
| Load Short Detection Delay Time   |                                     |      | 40    |      | $\mu S$    |
| <b>BATN Internal Resistance</b>   |                                     |      |       |      |            |
| Internal Resistance between BATN and $V_{DD}$   | $V_{DD} = 3.5V$ BATN=1.0V           |      | 320   |      | $k\Omega$  |
| Internal Resistance between BATN and GND  | $V_{DD} = 2.0V$ BATN=1.0V           |      | 100   |      | $k\Omega$  |
|   |                                     |      |       |      |            |
| Power FET on Resistance   | $V_{DD} = 3.5V$ , $I_{BATN} = 1.0A$ |      | 50    |      | $m\Omega$  |
| Over Temperature Protection   |                                     |      | 100   |      | $^\circ C$ |
| Over Temperature Hybrid   |                                     |      | 20    |      | $^\circ C$ |
| Note: Parameter with * is used for 4.35V Battery Protect, Other is for 4.2V Battery Protect |                                     |      |       |      |            |

## ■ Typical Operating Characteristics

The LN8232 monitors the voltage and current of a battery and protects it from being damaged due to overcharge voltage, over-discharge voltage, over-discharge current, and short circuit conditions by disconnecting the battery from the load or charger. These functions are required in order to operate the battery cell within specified limits.

### Normal operating mode

If no exception condition is detected, charging and discharging can be carried out freely. This condition is called the normal operating mode.

### Over-Charge Condition

When the battery voltage becomes higher than the over-charge detection voltage ( $V_{CU}$ ) during charging under normal condition and the state continues for the overcharge detection delay time ( $t_{CU}$ ) or longer, the LN8232 turns off the power switch FET.

### Over-Discharge Condition

When the battery voltage drops below the over-discharge detection voltage ( $V_{DL}$ ) during discharging under normal condition and it continues for the over-discharge detection delay time ( $t_{DL}$ ) or longer, the LN8232 turns off the power switch FET and stops discharging.

At the over-discharge condition, when a charger is connected, the power switch FET is still off. At this time, charging is still permitted through the parasitic diode of the power switch FET, when the battery voltage becomes higher than the over-discharge detection voltage ( $V_{DL}$ ), the LN8232 turns on the power switch FET and changes to the normal condition from the over-discharge condition.



### Over-Current Condition


When the discharging current becomes equal to or higher than a specified value during discharging under normal condition and the state continues for the over-current detection delay time or longer, the LN8232 turns off power switch FET to stop discharging, and the BATN pin is pulled up to high state by the internal control of LN8232. This condition includes over-current1, over-current2 or load short-circuiting.

The over-current condition returns to the normal mode when the load is released or the impedance between BATP and BATN is larger than 500k $\Omega$ .

The LN8232 provides two over-current detection levels (3A and 10A ) with two over-current delay time ( $T_{OI1}$  and  $T_{OI2}$  ) corresponding to each over-current detection level.

### Delay Circuits

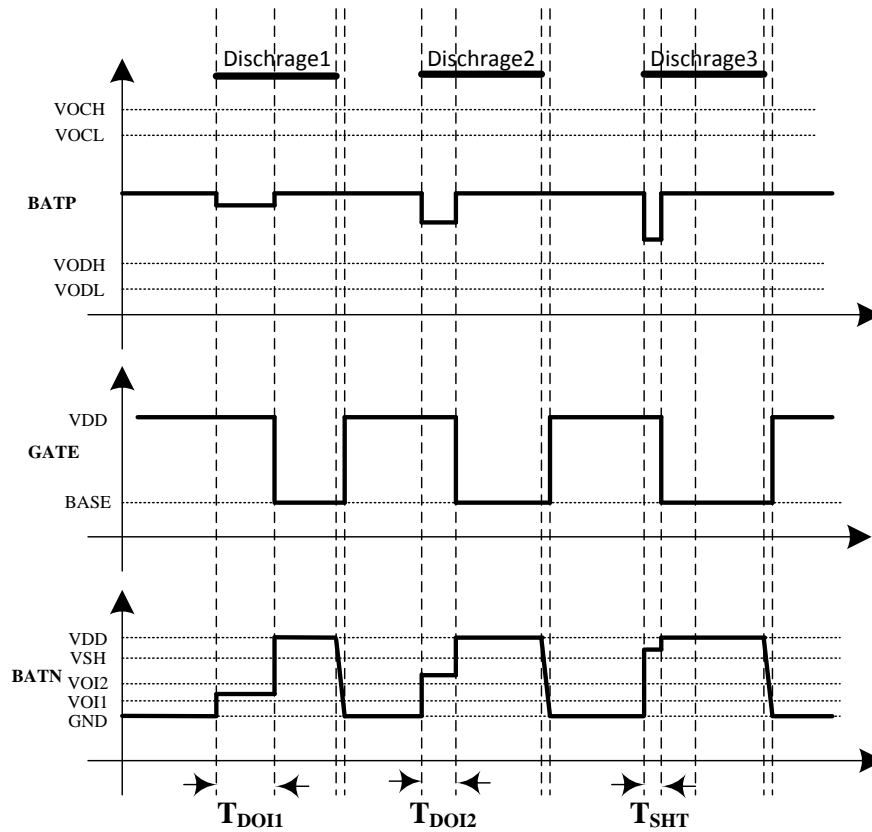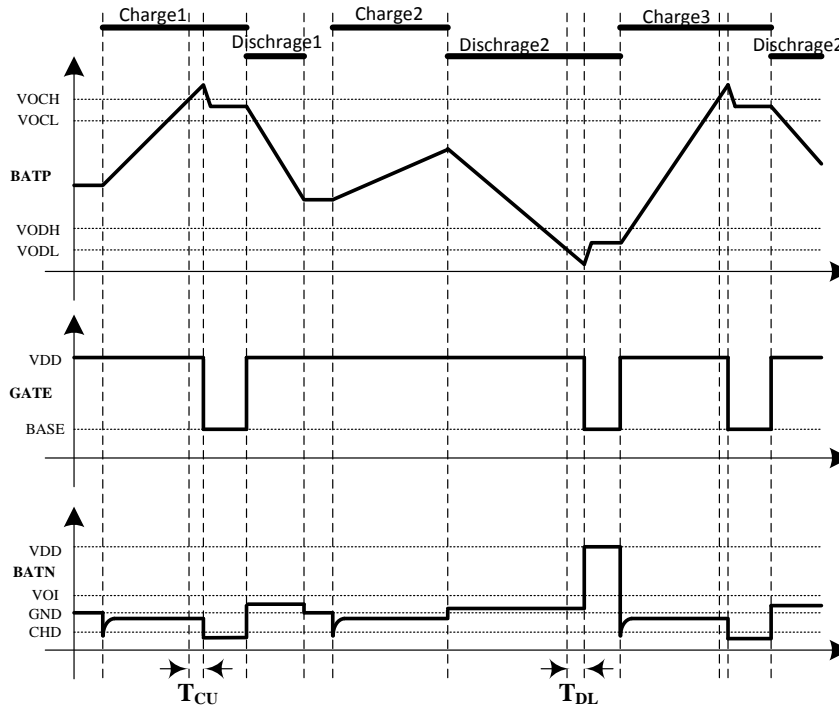

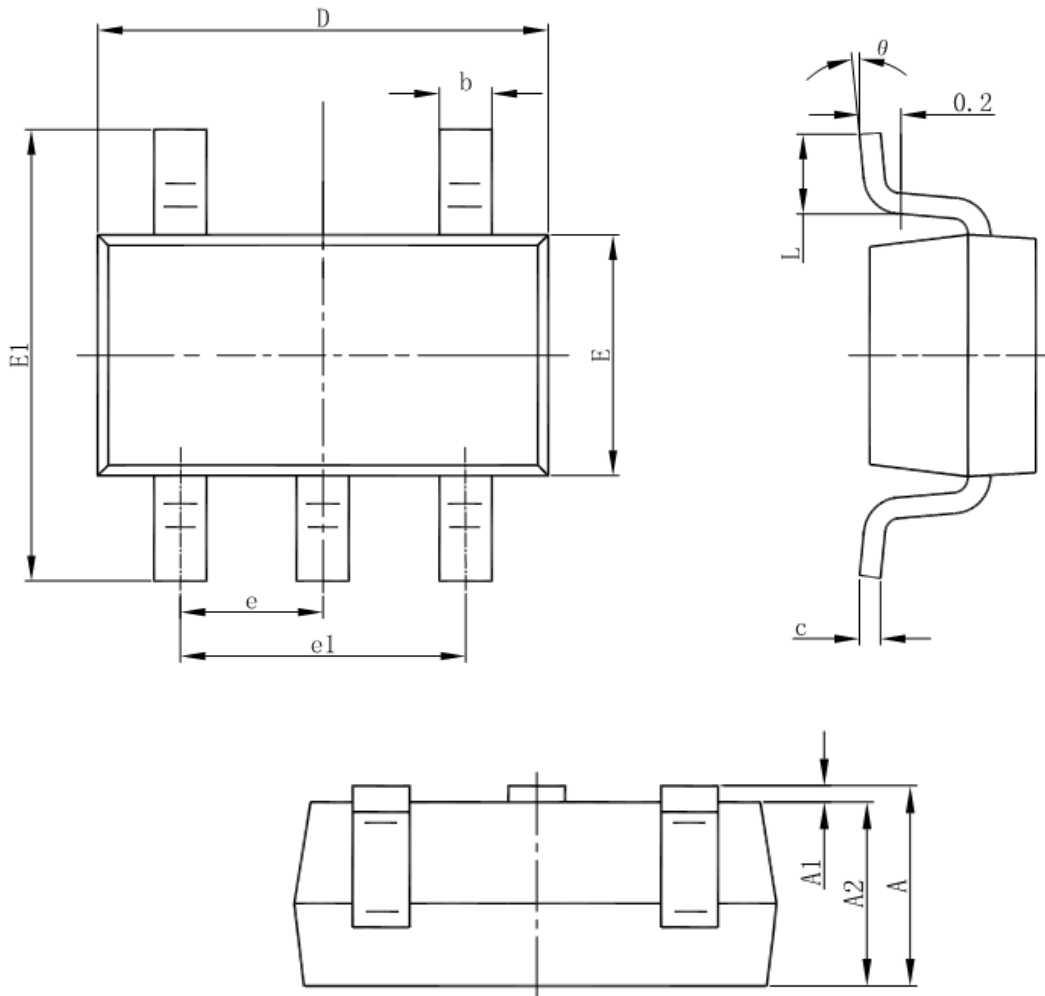**■ Package Information**
**■ SOT23-5L**


| Symbol   | Dimensions In Millimeters |       | Dimensions In Inches |       |
|----------|---------------------------|-------|----------------------|-------|
|          | Min                       | Max   | Min                  | Max   |
| A        | 1.050                     | 1.250 | 0.041                | 0.049 |
| A1       | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2       | 1.050                     | 1.150 | 0.041                | 0.045 |
| b        | 0.300                     | 0.500 | 0.012                | 0.020 |
| c        | 0.100                     | 0.200 | 0.004                | 0.008 |
| D        | 2.820                     | 3.020 | 0.111                | 0.119 |
| E        | 1.500                     | 1.700 | 0.059                | 0.067 |
| E1       | 2.650                     | 2.950 | 0.104                | 0.116 |
| e        | 0.950(BSC)                |       | 0.037(BSC)           |       |
| e1       | 1.800                     | 2.000 | 0.071                | 0.079 |
| L        | 0.300                     | 0.600 | 0.012                | 0.024 |
| $\theta$ | 0°                        | 8°    | 0°                   | 8°    |